

ESP5585-80D(I)

8.5Gbps 1550nm 80KM SFP+ Transceiver

PRODUCT FEATURES

- Up to 8.5Gb/s bi-directional data links
- Cooled EML transmitter and APD receiver
- link length up to 80KM
- Low Power Dissipation 1.5W Maximum
- Single 3.3V power supply
- Diagnostic Performance Monitoring of module temperature, supply Voltages, laser bias current, transmit optical power, receive optical power
- RoHS compliant and lead free
- Case operating temperature range:
Commercial: 0°C ~70°C
Industrial: -40°C ~85°C




APPLICATIONS

- Tri Rate 2.125/4.25/8.5Gbps Fiber Channel

DESCRIPTIONS

ETU-Link SFP+ ZR Transceiver is designed for 8.5G Fiber- Channel applications. The transceiver consists of two sections: The transmitter section incorporates a colded EML laser. And the receiver section consists of a APD photodiode integrated with a TIA. All modules satisfy class I laser safety requirements. ETU-Link SFP+ ZR Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472, which allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, received optical power and transceiver supply voltage.

Module Block Diagram

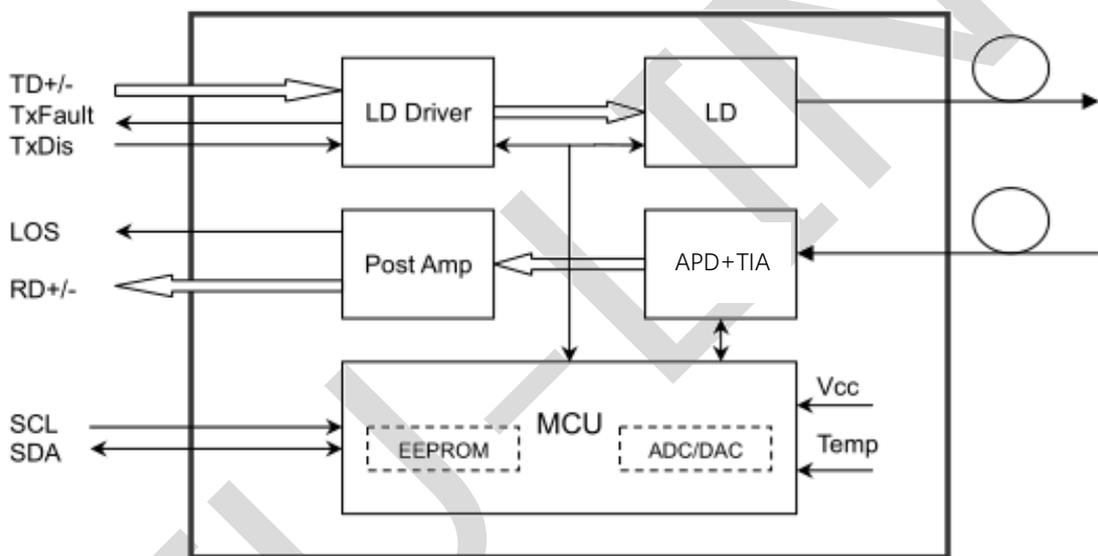

Ordering Information

| Part No. | Data Rate(optical) | Laser | Fiber Type | Distance | Optical Interface | Temp | DDMI |
|--------------|--------------------|-------|------------|----------|-------------------|----------|------|
| ESP5585-80D | 8.5Gbit/s | EML | SMF | 80km | LC | 0~70°C | Y |
| ESP5585-80DI | 8.5Gbit/s | EML | SMF | 80km | LC | -40~85°C | Y |

Absolute Maximum Ratings

| Parameter | Symbol | Min. | Typical | Max. | Unit | Notes |
|------------------------|--------|------|---------|------|------|-------|
| Maximum Supply Voltage | Vcc | -0.5 | | 4.7 | V | |

| | | | | | | |
|----------------------------|-------|-----|--|----|----|--|
| Storage Temperature | TS | -40 | | 85 | °C | |
| Case Operating Temperature | Tcase | -5 | | 70 | °C | |

Recommended Operating Conditions

| Parameter | Symbol | Min. | Typical | Max. | Unit | Notes |
|----------------------------|-------------------|------|---------|------|------|-------------|
| Case Operating Temperature | Top | 0 | - | 70 | °C | Commercial |
| | | -40 | | 85 | | Industrial |
| Power Supply Voltage | VCC | 3.14 | 3.3 | 3.47 | V | |
| Power Supply Current | ICC | - | | 450 | mA | |
| Data Rate | BR | | 8.5 | | Gbps | |
| Transmission Distance | TD | | - | 80 | km | |
| Coupled fiber | Single mode fiber | | | | | 9/125um SMF |

Electrical Characteristics (Tcase = -5 to 70°C, VCC = 3.14 to 3.46 Volts)

| Parameter | Symbol | Min. | Typical | Max. | Unit | Notes |
|-----------------------------------|------------|---------|---------|----------|------|-------|
| Supply Voltage | Vcc | 3.14 | 3.3 | 3.46 | V | |
| Supply Current | Icc | | | 450 | mA | |
| Transmitter (Module Input) | | | | | | |
| Input differential impedance | Rin | | 100 | | Ω | 1 |
| Single ended data input swing | Vin,pp | 180 | | 700 | mV | |
| Transmit Disable Voltage | VD | Vcc-1.3 | | Vcc | V | |
| Transmit Enable Voltage | VEN | Vee | | Vee+ 0.8 | V | 2 |
| Receiver (Module Output) | | | | | | |
| Differential data output swing | Vout,pp | 300 | | 850 | mV | 3 |
| Data output rise time | tr | 28 | | | ps | 4 |
| Data output fall time | tf | 28 | | | ps | 4 |
| LOS Fault | VLOS fault | Vcc-1.3 | | VccHOST | V | 5 |
| LOS Normal | VLOS norm | Vee | | Vee+0.8 | V | 5 |
| Power Supply Rejection | PSR | 100 | | | mVpp | 6 |

Notes:

1. Connected directly to TX data input pins. AC coupled thereafter.
2. Or open circuit.
3. Into 100 ohms differential termination.
4. 20 – 80 %.
5. Loss Of Signal is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
6. Receiver sensitivity is compliant with power supply sinusoidal modulation of 20 Hz to 1.5 MHz up to specified value applied through the recommended power supply filtering network.

Optical and Characteristics (Tcase = -5 to 70°C, VCC = 3.14 to 3.46 Volts)

| Parameter | Symbol | Min. | Typical | Max. | Unit | Notes |
|------------------------------------|------------------------|------|---------|-------|-------|-------|
| Transmitter | | | | | | |
| Output Opt. Pwr | POUT | 0 | | 4 | dBm | 1 |
| Optical Wavelength | λ | 1530 | 1550 | 1570 | nm | |
| Wavelength Temperature Dependence | | | 0.08 | 0.125 | nm/°C | |
| Spectral Width (-20dB) | σ | | | 1 | nm | |
| Optical Extinction Ratio | ER | 6 | | | dB | |
| Transmitter and Dispersion Penalty | TDP | | | 3.2 | dB | |
| Optical Rise/Fall Time | tr/ tf | | | 30 | ns | |
| RIN | RIN | | | -128 | dB/Hz | |
| Output Eye Mask | Compliant with FC-PI-4 | | | | | |
| Receiver | | | | | | |
| Rx Sensitivity | RSENS | | | -24 | dBm | 2 |
| Input Saturation Power (Overload) | Psat | 0.5 | | | dBm | |
| Wavelength Range | λ_c | 1260 | | 1360 | nm | |
| LOS De -Assert | LOSD | | | -26 | dBm | |
| LOS Assert | LOSA | -35 | | | dBm | |
| LOS Hysteresis | | 0.5 | 1.0 | | dB | |


Notes:

- High Bandwidth Mode. Class 1 Laser Safety per FDA/CDRH and EN (IEC) 60825 regulations.
- Also specified to meet curves in FC-PI-4 Rev 8.001 Figures 21, 22, and 23, which allow trade-off between wavelength, spectral width and OMA.
- Equivalent extinction ratio specification for Fibre Channel. Allows smaller ER at higher average power.
- For 8.5 Gb/s operation, Jitter values for gamma T and gamma R are controlled by TDP and stressed receiver sensitivity.
- Measured with conformance signals defined in FC-PI-4 Rev. 8.00 specifications. Value in OMA. Measured with PRBS 31-1 at 10-12 BER.

Digital Diagnostics

| Parameter | Range | Accuracy | Unit | Calibration |
|-----------------|-----------|----------|------|-------------|
| Temperature | -40 to 85 | ±3 | °C | Internal |
| Voltage | 0 to Vcc | ±3% | V | Internal |
| Tx Bias Current | 0 to 100 | ±10% | mA | Internal |
| Tx Output Power | 0 to 4 | ±3 | dB | Internal |
| Rx Input Power | -24 to -5 | ±3 | dB | Internal |

Pin Diagram

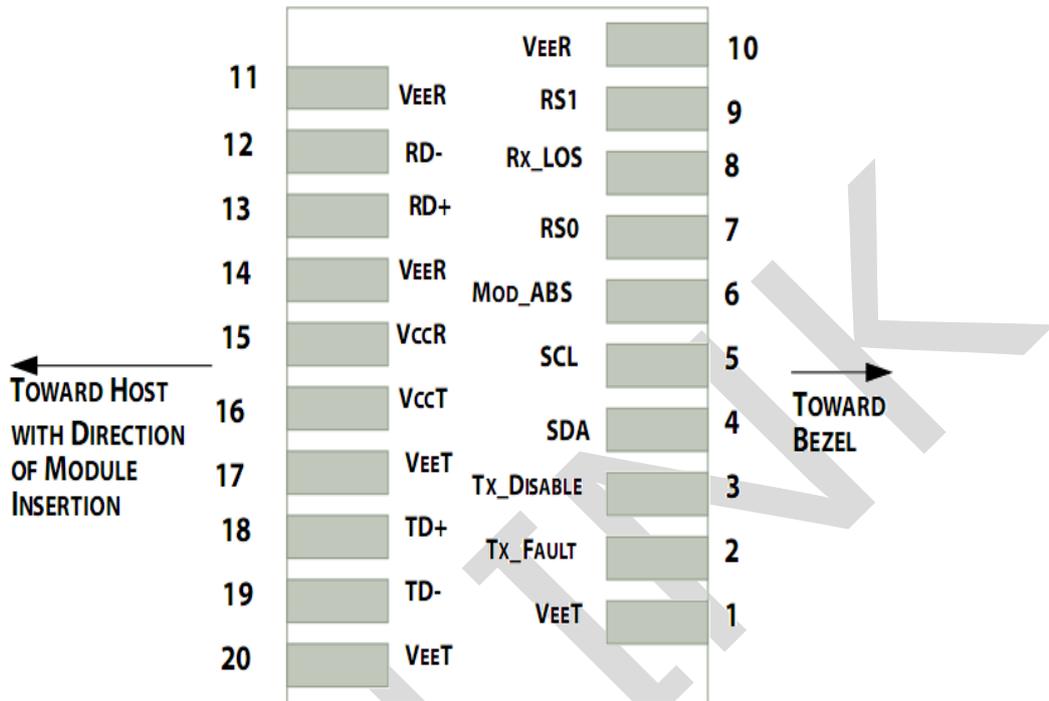

Pin Definitions


| PIN # | Name | Function | Notes |
|-------|-------------|--|-------|
| 1 | V_{EET} | Transmitter Ground (Common with Receiver Ground) | 1 |
| 2 | T_{FAULT} | Transmitter Fault. | 2 |
| 3 | T_{DIS} | Transmitter Disable. Laser output disabled on high or open. | 3 |
| 4 | SDA | 2-wire Serial Interface Data Line | 4 |
| 5 | SCL | 2-wire Serial Interface Clock Line | 4 |
| 6 | MOD_ABS | Module Absent. Grounded within the module | 4 |
| 7 | RS0 | Rate Select 0 | 5 |
| 8 | LOS | Loss of Signal indication. Logic 0 indicates normal operation. | 6 |
| 9 | RS1 | No connection required | 1 |
| 10 | V_{EER} | Receiver Ground (Common with Transmitter Ground) | 1 |
| 11 | V_{EER} | Receiver Ground (Common with Transmitter Ground) | 1 |
| 12 | RD- | Receiver Inverted DATA out. AC Coupled | |
| 13 | RD+ | Receiver Non-inverted DATA out. AC Coupled | |
| 14 | V_{EER} | Receiver Ground (Common with Transmitter Ground) | 1 |
| 15 | V_{CCR} | Receiver Power Supply | |
| 16 | V_{CCT} | Transmitter Power Supply | |
| 17 | V_{EET} | Transmitter Ground (Common with Receiver Ground) | 1 |

| | | | |
|----|------------------|--|---|
| 18 | TD+ | Transmitter Non-Inverted DATA in. AC Coupled. | |
| 19 | TD- | Transmitter Inverted DATA in. AC Coupled. | |
| 20 | V _{EET} | Transmitter Ground (Common with Receiver Ground) | 1 |

Notes:


1. Circuit ground is internally isolated from chassis ground.
2. T_{FAULT} is an open collector/drain output, which should be pulled up with a 4.7k – 10k Ohms resistor on the host board if intended for use. Pull up voltage should be between 2.0V to Vcc + 0.3V. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
3. Laser output disabled on T_{DIS} >2.0V or open, enabled on T_{DIS} <0.8V.
4. Should be pulled up with 4.7kΩ- 10kΩ host board to a voltage between 2.0V and 3.6V. MOD_ABS pulls line low to indicate module is plugged in.
5. Internally pulled down per SFF-8431 Rev 4.1.
6. LOS is open collector output. It should be pulled up with 4.7kΩ – 10kΩ on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

Recommended Interface Circuit

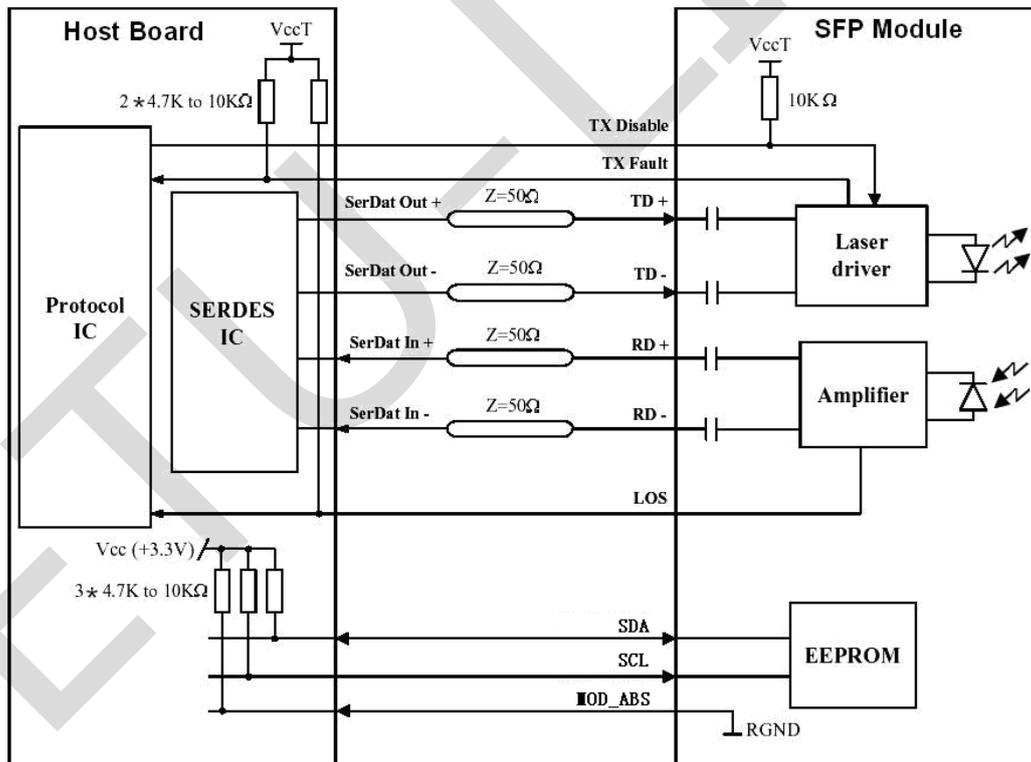

Mechanical Diagram

Comply with SFF-8432 rev. 5.0, the improved Pluggable form factor specification.

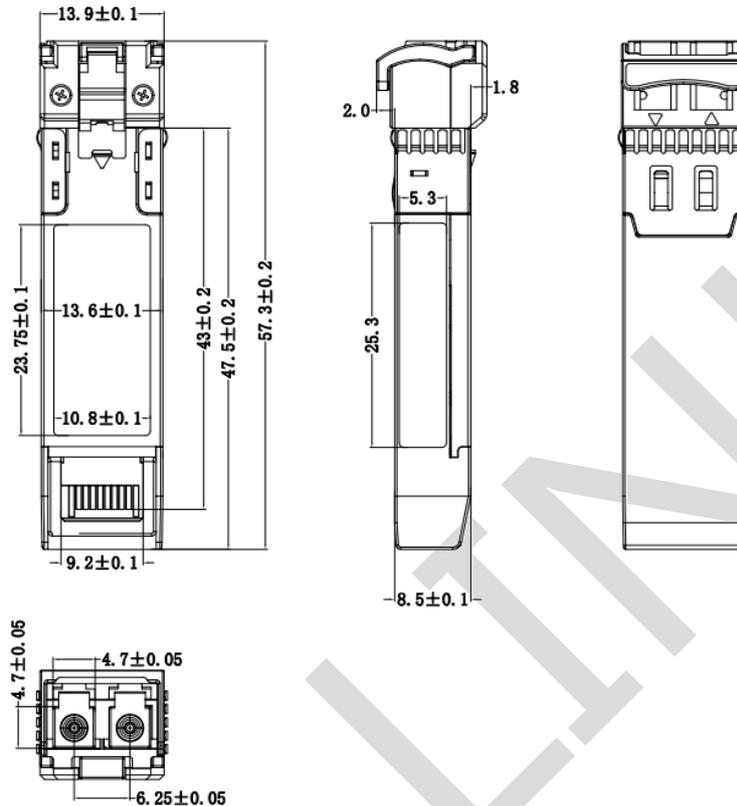

Revision History

| Version No. | Date | Description |
|-------------|------------------|-----------------------|
| 1.0 | February 8, 2016 | Preliminary datasheet |
| 2.0 | October 11, 2029 | Product upgrades |
| 2.1 | Sep 02, 2024 | Format change |

Company: ETU-Link Technology Co., LTD

Production base: Right side of 3rd floor, No. 102 building, Longguan expressway, Dalang street, Longhua District, Shenzhen city, Guangdong Province, China 518109

R&D base: Floor 4, Building 4, Nanshan Yungu Phase LI, Taoyuan Community, Xili Street, Nanshan District, Shenzhen

Tel: +86-755 2328 4603

Addresses and phone number also have been listed at www.etulinktechnology.com.

Please e-mail us at sales@etulinktechnology.com or call us for assistance.