

ESCxxX-20D(I) 10Gbps CWDM 20KM SFP+ Transceiver

PRODUCT FEATURES

- Support data rate up to 11.3Gb/s
- Hot-Pluggable SFP Footprint and Single LC Connector
- Up to 20km reach for G.652 SMF
- CWDM DFB laser and PIN receiver
- Temperature Range:
 - Commercial: 0°C ~70°C
 - Extended: -20°C ~85°C
 - Industrial: -40°C ~85°C
- Power consumption <1W
- Compliant with SFP-8431
- Compliant with SFP-8432
- Compliant with SFP-8472
- Compliant with IEEE802.3ae
- RoHS 6 compliance
- Complies with EU Directive 2015/863/EU



APPLICATIONS


- 10GBASE-LR/LW
- OTU2/2e
- Other Optical Links

DESCRIPTIONS

This CWDM DFB 10Gbps SFP+ transceiver is designed to transmit and receive optical data over single mode optical fiber for link length 20km.

The SFP+ 20km module electrical interface is compliant to SFI electrical specifications. The transmitter input and receiver output impedance is 100 Ohms differential. Data lines are internally AC coupled. The module provides differential termination and reduce differential to common mode conversion for quality signal termination and low EMI.

Module Block Diagram

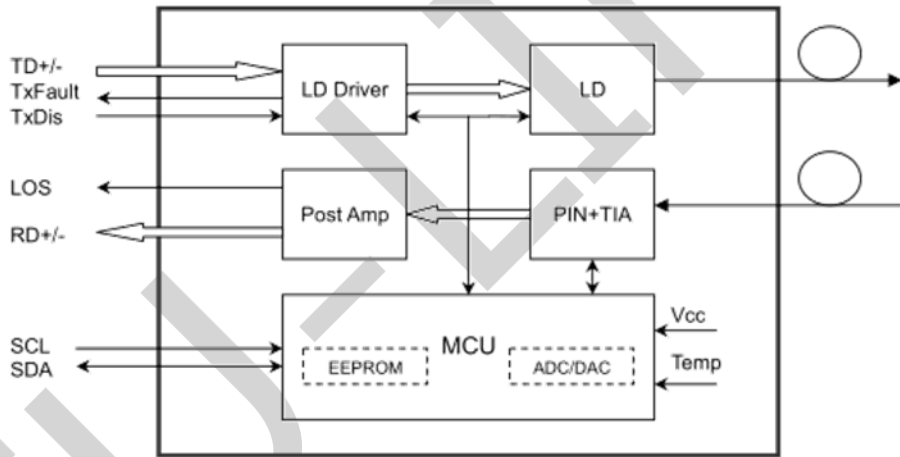

Ordering Information

Part No.	Data Rate(optical)	Laser	Fiber Type	Distance	Optical Interface	Temp	DDMI
ESCxxX-20D	10.3125Gbps	CWDM	SMF	20km	LC	0~70°C	Y
ESCxxX-20DE	10.3125Gbps	CWDM	SMF	20km	LC	-20~85°C	Y
ESCxxX-20DI	10.3125Gbps	CWDM	SMF	20km	LC	-40~85°C	Y

Wavelength Guide Pin Descriptions

Part No.	Channel	Wavelength(nm)		
		min	typical	max
ESC27X-20D	C27	1264.5	1271	1277.5
ESC29X-20D	C29	1284.5	1291	1297.5
ESC31X-20D	C31	1304.5	1311	1317.5
ESC33X-20D	C33	1324.5	1331	1337.5
ESC35X-20D	C35	1344.5	1351	1357.5
ESC37X-20D	C37	1364.5	1371	1377.5
ESC39X-20D	C39	1384.5	1391	1397.5
ESC27X-20DI	C27	1263.5	1271	1278.5
ESC29X-20DI	C29	1283.5	1291	1298.5
ESC31X-20DI	C31	1303.5	1311	1318.5
ESC33X-20DI	C33	1323.5	1331	1338.5
ESC35X-20DI	C35	1343.5	1351	1358.5
ESC37X-20DI	C37	1363.5	1371	1378.5
ESC39X-20DI	C39	1383.5	1391	1398.5

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Storage Temperature	T _{stg}	-40		+85	°C	
Relative Humidity - Storage	R _{HS}	5		95	%	
Relative Humidity - Operating	R _{HO}	5		85	%	
DC Supply Voltage	V _{CC}	0		3.6	V	

Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Case Operating Temperature	Top	0	-	70	°C	Commercial
		-40		85		Industrial
Power Supply Voltage	V _{CC}	3.13	3.3	3.47	V	
Transmission Distance	TD	-	-	10	km	Over SMF

Electrical Characteristics

High-Speed Signal: Compliant to CEI-11G-SR

Low-Speed Signal: Compliant to SFF-8419

Parameter		Symbol	Min.	Typical	Max.	Unit	Notes
Transmitter (Module Input)							
Differential Input Resistance		R_R _{din}	80	100	120	Ω	
Input Differential Voltage		R_V _{diff}	110	-	1050	mVpp	
Tx_Disable	Normal Operation	V _{IL}	-0.3	-	0.8	V	
	Laser Disable	V _{IH}	2.0	-	V _{CC} +0.3	V	
Receiver (Module Output)							
Differential Resistance		T_R _d	80	100	120	Ohm	
Output Differential Voltage		T_V _{diff}	360	-	770	mVpp	
Differential Termination Resistance Mismatch		T_R _{dm}	-	-	5	%	
Rx los	Normal Operation	V _{OL}	-0.3	-	0.4	V	
	Loss Signal	V _{OH}	2		V _{CCHOST}	V	

Optical and Characteristics

Parameter		Symbol	Min.	Typical	Max.	Unit	Notes
Transmitter							
Average Output Power		POUT	-6		-0.5	dBm	1
Average Output Power(Laser Off)		POFF			-30	dBm	
Extinction ratio		ER	3.5			dB	
Transmitter waveform and dispersion penalty (TWDP)					4.7	dB	
RIN20OMA		RIN			-128	dB/Hz	
Optical return loss tolerance		ORLT	20			dB	
Receiver							
Wavelength		λ	1260		1620	nm	
Received Sensitivity		P _{IN}			-15	dBm	BER<1x10 ⁻¹²
Optical Power Overload		P _{IN} (SAT)	0.5			dBm	
Damage threshold				1.5		dBm	2
Receiver Reflectance		RFL			-12	dB	
Rx_LOS of Signal Assert		P _A	-30			dBm	
Rx_LOS of Signal De-assert		P _D			-18	dBm	
Rx_LOS of Signal Hysteresis		PHy	0.5		5	dB	
Optical Return Loss Tolerance		ORLT	20			dB	

Notes:

- The optical power is launched into SMF.
- The receiver shall be able to tolerate, without damage, continuous exposure to an optical input signal having this average power level. The receiver does not have to operate correctly at this input power.


Digital Diagnostics

Parameter	Range	Accuracy	Unit	Calibration
Temperature	-40 to 85	±3	°C	Internal
Voltage	3 to 3.6	±3%	V	Internal
Tx Bias Current	0 to 100	±10%	mA	Internal
Tx Output Power	-6 to -0.5	±3	dB	Internal
Rx Input Power	-15 to 0.5	±3	dB	Internal

Communication Interface Timing Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
TX_Disable Assert Time	t_off			100	us	
TX_Disable Negate Time	t_on			2	ms	
Time to Initialize Include Reset of TX_FAULT	t_int			300	ms	
TX_FAULT from Fault to Assertion	t_fault			100	us	
TX_Disable Time to Start Reset	t_reset	10			us	
Receiver Loss of Signal Assert Time	T _{A,RX_LOS}			100	us	
Receiver Loss of Signal Deassert Time	T _{d,RX_LOS}			100	us	
Rate-Select Chage Time	t_ratesel			10	us	

Pin Diagram

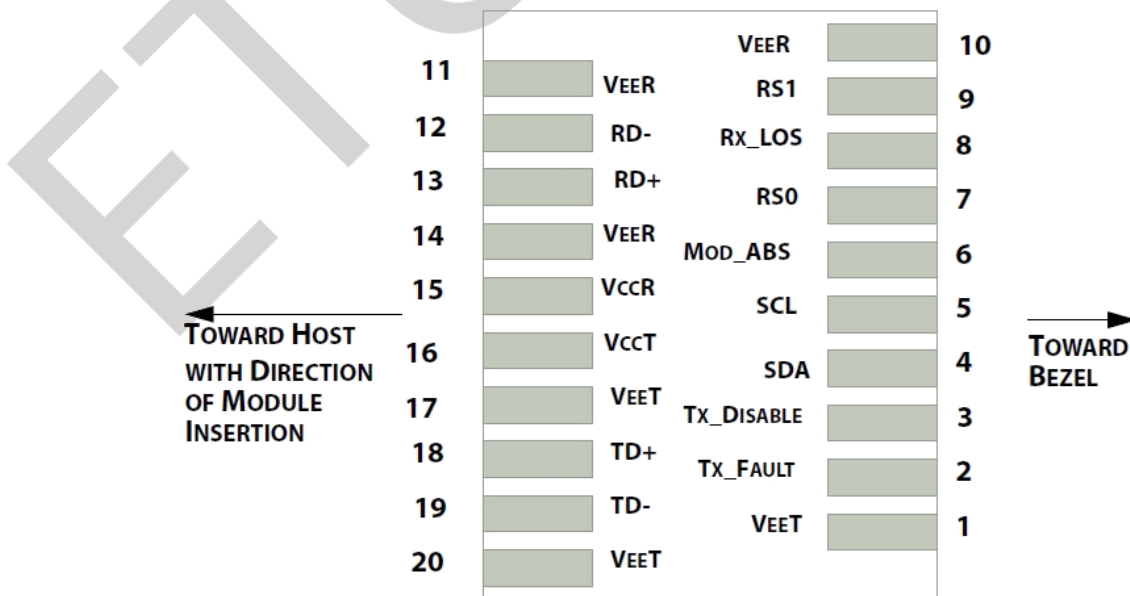


Pin Definitions

PIN #	Name	Function	Notes
1	VeeT	Module transmitter ground	1
2	Tx Fault	Module transmitter fault	2
3	Tx Disable	Transmitter Disable; Turns off transmitter laser output	3
4	SDL	2 wire serial interface data input/output (SDA)	4
5	SCL	2 wire serial interface clock input (SCL)	4
6	MOD-ABS	Module Absent, connect to VeeR or VeeT in the module	4
7	RS0	Rate select0, optionally control SFP+ receiver. When high, input data rate >4.5Gb/s; when low, input data rate <=4.5Gb/s	5
8	LOS	Receiver Loss of Signal Indication	6
9	RS1	Rate select0, optionally control SFP+ transmitter. When high, input data rate >4.5Gb/s; when low, input data rate <=4.5Gb/s	1
10	VeeR	Module receiver ground	1
11	VeeR	Module receiver ground	1
12	RD-	Receiver inverted data output	
13	RD+	Receiver non-inverted data output	
14	VeeR	Module receiver ground	1
15	VccR	Module receiver 3.3V supply	
16	VccT	Module transmitter 3.3V supply	
17	VeeT	Module transmitter ground	1
18	TD+	Transmitter inverted data output	
19	TD-	Transmitter non-inverted data output	
20	VeeT	Module transmitter ground	1


Notes:

- Circuit ground is internally isolated from chassis ground
- Tx FAULT is an open collector/drain output, which should be pulled up with a 4.7k – 10k Ohms resistor on the host board if intended for use. Pull up voltage should be between 2.0V to Vcc + 0.3V. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
- Laser output disabled on Tx DIS >2.0V or open, enabled on Tx DIS <0.8V.
- Should be pulled up with 4.7kΩ- 10kΩ host board to a voltage between 2.0V and 3.6V. MOD_ABS pulls line low to indicate module is plugged in.
- Internally pulled down per SFF-8431 Rev 4.1.
- LOS is open collector output. It should be pulled up with 4.7kΩ – 10kΩ on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

Recommended Interface Circuit

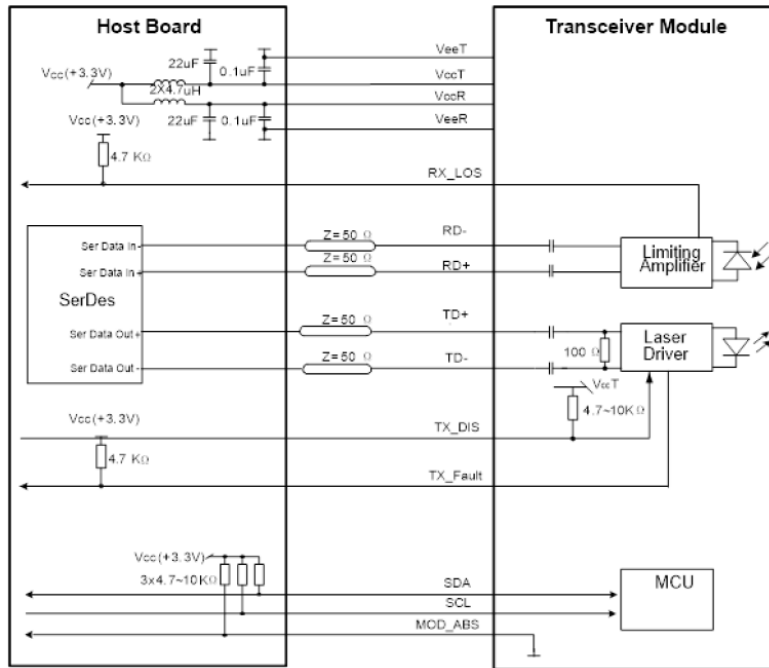

Mechanical Diagram

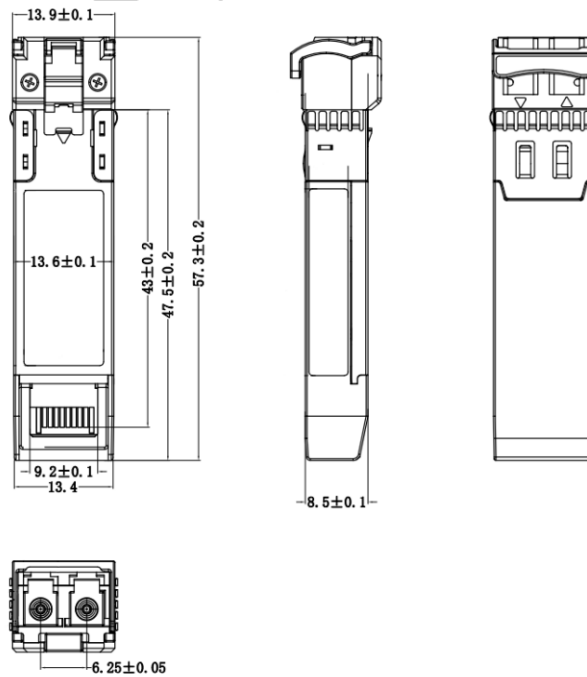

Revision History

Version No.	Date	Description
1.0	February 4, 2016	Preliminary datasheet
2.0	December 10, 2023	Product upgrades
2.0	Aug 21, 2024	Format change

Company: ETU-Link Technology Co., LTD

Production base: Right side of 3rd floor, No. 102 building, Longguan expressway, Dalang street, Longhua District, Shenzhen city, Guangdong Province, China 518109

R&D base: Floor 4, Building 4, Nanshan Yungu Phase LI, Taoyuan Community, Xili Street, Nanshan District, Shenzhen

Tel: +86-755 2328 4603

Addresses and phone number also have been listed at www.etulinktechnology.com.

Please e-mail us at sales@etulinktechnology.com or call us for assistance.