

## XFP Series

### XFP

#### EXTDxxX-3LCD80

##### 10Gb/s Tunable DWDM 80KM XFP Transceiver

- Supports 9.95Gb/s to 11.3Gb/s bit rates
- Monolithically integrated full C-band tunable transmitter
- 50GHz ITU channel spacing with integrated wavelength locker
- C-band-tunable Laser and APD receiver
- Maximum link length of 80km
- Full Duplex LC connector
- Hot-pluggable XFP footprint
- Supports Line-side and XFI loopback
- No Reference Clock required
- Built-in digital diagnostic functions
- Standard bail release mechanism
- Power dissipation <3.5W



#### Applications

- DWDM 10GBASE-ZR/ZW 10G Ethernet
- DWDM 80KM 10G Fiber Channel
- DWDM SONET OC-192&SDH STM-64

#### Description

The ETU-Link tunable 10Gb/s XFP transceiver is an integrated fiber optic transceiver that provides a high-speed serial link at signaling rates from 9.95Gb/s to 11.35Gb/s. The module complies with the 10Gigabit small form factor pluggable (XFP) multisource agreement-MSA (INF-8077i) and Tunable XFP for ITU Frequency Grid Applications (SFF-8477) .

It complies with the ITU-T G.698.1 standard with 50GHz channel spacing for SONET/SDH, IEEE DWDM 10GBASE-ZR for 80km reach (Ethernet), and DWDM 10GFC for 80km reach (Fiber Channel) applications.

The transceiver integrates the receiver and transmit path on one module. On the transmit side, the 10Gbps serial data stream is recovered, retimed, and passed to a modulator driver. The modulator driver biases and modulates a C-band-tunable integrated laser Mach-Zehnder (ILMZ), enabling data transmission over single-mode fiber through an industry-standard LC connector. On the receiver side, the 10Gbps data stream is recovered from an APD/ trans-impedance amplifier, retimed, and passed to an output driver. This module features a hot-pluggable XFI-compliant electrical interface.

## Product selection

Product part Number	Channel number	Range of channel(THZ)	Range of wavelength(nm)
EXTDxxX-3LCD80	82	191.95~196.00	1529.55~1561.83
EXTDxxX-3LCD80	88	191.75~196.10	1528.77~1563.45

## Wavelength Guide Pin Descriptions

### EXTDxxX-3LCD80

Channel	Wavelength (nm)	Frequency(THZ)	Channel	Wavelength (nm)	Frequency (THZ)
1	1561.83	191.95	42	1545.32	194
2	1561.42	192	43	1544.92	194.05
3	1561.01	192.05	44	1544.53	194.1
4	1560.61	192.1	45	1544.13	194.15
5	1560.2	192.15	46	1543.73	194.2
6	1559.79	192.2	47	1543.33	194.25
7	1559.39	192.25	48	1542.94	194.3
8	1558.98	192.3	49	1542.54	194.35
9	1558.58	192.35	50	1542.14	194.4
10	1558.17	192.4	51	1541.75	194.45
11	1557.77	192.45	52	1541.35	194.5
12	1557.36	192.5	53	1540.95	194.55
13	1556.96	192.55	54	1540.56	194.6
14	1556.55	192.6	55	1540.16	194.65
15	1556.15	192.65	56	1539.77	194.7
16	1555.75	192.7	57	1539.37	194.75
17	1555.34	192.75	58	1538.98	194.8
18	1554.94	192.8	59	1538.58	194.85

19	1554.54	192.85	60	1538.19	194.9
20	1554.13	192.9	61	1537.79	194.95
21	1553.73	192.95	62	1537.4	195
22	1553.33	193	63	1537	195.05
23	1552.93	193.05	64	1536.61	195.1
24	1552.52	193.1	65	1536.22	195.15
25	1552.12	193.15	66	1535.82	195.2
26	1551.72	193.2	67	1535.43	195.25
27	1551.32	193.25	68	1535.04	195.3
28	1550.92	193.3	69	1534.64	195.35
29	1550.52	193.35	70	1534.25	195.4
30	1550.12	193.4	71	1533.86	195.45
31	1549.72	193.45	72	1533.47	195.5
32	1549.32	193.5	73	1533.07	195.55
33	1548.91	193.55	74	1532.68	195.6
34	1548.51	193.6	75	1532.29	195.65
35	1548.11	193.65	76	1531.9	195.7
36	1547.72	193.7	77	1531.51	195.75
37	1547.32	193.75	78	1531.12	195.8
38	1546.92	193.8	79	1530.72	195.85
39	1546.52	193.85	80	1530.33	195.9
40	1546.12	193.9	81	1529.94	195.95
41	1545.72	193.95	82	1529.55	196
Non-ITU	<b>Peak wavelength between 1529.55nm-1561.83nm</b>				

### EXTDxxX-3LCD80

Channel	Wavelength (nm)	Frequency(THZ)	Channel	Wavelength (nm)	Frequency (THZ)
			44	1546.12	193.9
1	1563.45	191.75	45	1545.72	193.95
2	1563.05	191.8	46	1545.32	194
3	1562.64	191.85	47	1544.92	194.05
4	1562.23	191.9	48	1544.53	194.1
5	1561.83	191.95	49	1544.13	194.15
6	1561.42	192	50	1543.73	194.2
7	1561.01	192.05	51	1543.33	194.25
8	1560.61	192.1	52	1542.94	194.3
9	1560.2	192.15	53	1542.54	194.35
10	1559.79	192.2	54	1542.14	194.4
11	1559.39	192.25	55	1541.75	194.45
12	1558.98	192.3	56	1541.35	194.5

13	1558.58	192.35	57	1540.95	194.55
14	1558.17	192.4	58	1540.56	194.6
15	1557.77	192.45	59	1540.16	194.65
16	1557.36	192.5	60	1539.77	194.7
17	1556.96	192.55	61	1539.37	194.75
18	1556.55	192.6	62	1538.98	194.8
19	1556.15	192.65	63	1538.58	194.85
20	1555.75	192.7	64	1538.19	194.9
21	1555.34	192.75	65	1537.79	194.95
22	1554.94	192.8	66	1537.4	195
23	1554.54	192.85	67	1537	195.05
24	1554.13	192.9	68	1536.61	195.1
25	1553.73	192.95	69	1536.22	195.15
26	1553.33	193	70	1535.82	195.2
27	1552.93	193.05	71	1535.43	195.25
28	1552.52	193.1	72	1535.04	195.3
29	1552.12	193.15	73	1534.64	195.35
30	1551.72	193.2	74	1534.25	195.4
31	1551.32	193.25	75	1533.86	195.45
32	1550.92	193.3	76	1533.47	195.5
33	1550.52	193.35	77	1533.07	195.55
34	1550.12	193.4	78	1532.68	195.6
35	1549.72	193.45	79	1532.29	195.65
36	1549.32	193.5	80	1531.9	195.7
37	1548.91	193.55	81	1531.51	195.75
38	1548.51	193.6	82	1531.12	195.8
39	1548.11	193.65	83	1530.72	195.85
40	1547.72	193.7	84	1530.33	195.9
41	1547.32	193.75	85	1529.94	195.95
42	1546.92	193.8	86	1529.55	196
43	1546.52	193.85	87	1529.16	196.05
Non-ITU	<b>Peak wavelength between 1528.77nm-1563.45nm</b>		88	1528.77	196.1

**Note:**

- 1) When a tunable module is plugged in for the first time, it will go to a default channel, or Tx\_DIS asserted it will go to a standby condition.EXTDXX92-3LCD80default channel is 1561.83nm, with channel range from 1to 82, and EXTDxxX-3LCD802default channel is 1563.45nm, compatible with channel range from 1 to 88.
- 2) When the module is power cycled it will automatically go to the last channel selected, or Tx\_DIS asserted it will go to a standby condition. If Tx\_DIS asserted, the last channel selected will be cleared, and a valid new channel command will be required to set a channel.
- 3) If the Tx disabled and then re-enabled, the module returns to the last channel selected.

## Absolute Maximum Ratings

Parameter	Symbol	Min	Typ	Max	Unit	NOTE
Maximum Supply Voltage 1	Vcc3	-0.5		4.0	V	
Maximum Supply Voltage 2	Vcc5	-0.5		6.0	V	
Storage Temperature	TS	-40		85	°C	
Case Operating Temperature	Tcase	0		70	°C	

## Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	NOTE
Main Supply Voltage	Vcc5	4.75		5.25	V	
Supply Voltage #2	Vcc3	3.13		3.45	V	
Supply Current – Vcc5 supply	Icc5			350	mA	
Supply Current – Vcc3 supply	Icc3			450	mA	
Module total power	P			3.5	W	1
<b>Transmitter</b>						
Input differential impedance	Rin		100		Ω	2
Differential data input swing	Vin,pp	120		820	mV	
Transmit Disable Voltage	VD	2.0		Vcc	V	
Transmit Enable Voltage	VEN	GND		GND+ 0.8	V	
<b>Receiver</b>						
Differential data output swing	Vout,pp	340	650	850	mV	3
LOS Fault	VLOS fault	Vcc – 0.5		VccHOST	V	4
LOS Normal	VLOS norm	GND		GND+0.5	V	4

### Notes:

- 1) Maximum total power value is specified across the full temperature and voltage range.
- 2) After internal AC coupling.
- 3) Into 100 ohms differential termination.
- 4) Loss Of Signal is open collector to be pulled up with a 4.7k – 10kohm resistor to 3.15 – 3.6V. Logic 0 indicates normal operation; logic 1 indicates no signal detected.

## Optical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	NOTE
<b>Transmitter</b>						
Average Optical Power	Pf	-1		3	dBm	
Wavelength range		1529.55		1561.83	nm	EXTDxxX-3LCD80
		1528.77		1563.45	nm	EXTDxxX-3LCD80
Optical Wavelength	$\lambda_c$	$\lambda_c -0.05$		$\lambda_c +0.05$	nm	
Center Wavelength Spacing			50		GHz	1
Frequency stability (BOL)		-1.5		1.5	GHz	
Frequency stability (EOL)		-2.5		2.5	GHz	
Side mode Suppression ratio	SMSR	30			dB	
Optical Extinction Ratio	ER	9			dB	
Transmitter and Dispersion Penalty	TDP			3	dB	
Average Launch power of OFF transmitter	POFF			-30	dBm	
<b>Receiver</b>						
Rx Sensitivity	RSENS			-24	dBm	Back to back ,2
				-21.5		Fiber(-300 to 1450ps/nm)
Input Saturation Power (Overload)	Psat	-7			dBm	
Wavelength Range	$\lambda_c$	1260		1600	nm	
Receiver Reflectance	Rrx			-27	dB	
LOS De-Assert	LOSD			-27	dBm	
LOS Assert	LOSA	-37			dBm	
LOS Hysteresis		0.5			dB	

**Notes:**

- 1) Corresponds to approximately 0.4 nm.
- 2) Measured with worst ER; BER<10<sup>-12</sup> with 10.3Gbps,2<sup>31</sup> – 1 PRBS.

## General Specifications

Parameter	Symbol	Min	Typ	Max	Units	NOTE
Bit Rate	BR	9.95		11.3	Gb/s	1
Bit Error Ratio	BER			$10^{-12}$		2
Max. Supported Link Length	LMAX			80	km	1

**Notes:**

1. 10GBASE-ZR/ZW
2. Tested with  $2^{31} - 1$  PRBS

## Pin Assignment

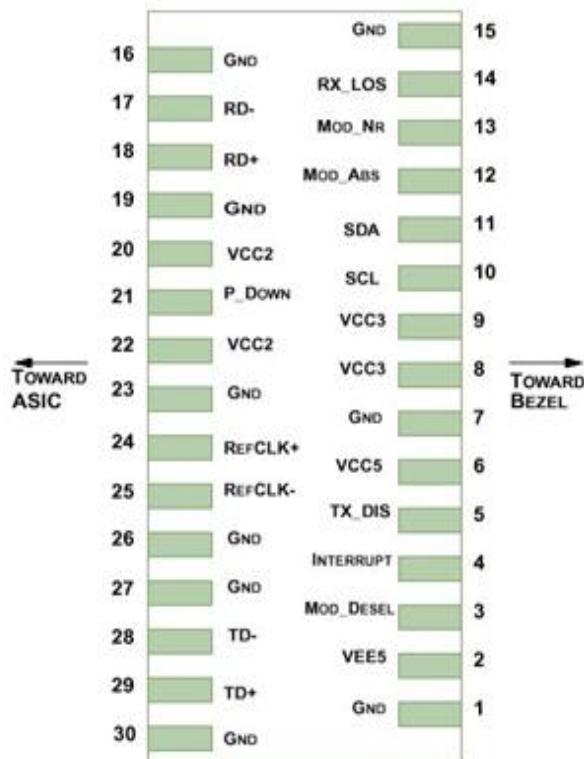


Diagram of Host Board Connector Block Pin Numbers and Name

Pin	Logic	Symbol	Name/Description	NOTE
1		GND	Module Ground	1
2		VEE5	Optional -5.2 Power Supply – Not required	
3	LVTTL-I	Mod-Desel	Module De-select; When held low allows the module to respond to 2-wire serial interface commands	
4	LVTTL-O	Interrupt	Interrupt (bar); Indicates presence of an important condition which can be read over the serial 2-wire interface	2
5	LVTTL-I	TX_DIS	Transmitter Disable; Transmitter laser source turned off	
6		VCC5	+5 Power Supply	
7		GND	Module Ground	1
8		VCC3	+3.3V Power Supply	
9		VCC3	+3.3V Power Supply	
10	LVTTL-I	SCL	Serial 2-wire interface clock	2
11	LVTTL/I/O	SDA	Serial 2-wire interface data line	2
12	LVTTL-O	Mod_Abs	Module Absent; Indicates module is not present. Grounded in the module.	2
13	LVTTL-O	Mod_NR	Module Not Ready; ETU-LINK defines it as a logical OR between RX_LOS and Loss of Lock in TX/RX.	2
14	LVTTL-O	RX_LOS	Receiver Loss of Signal indicator	2
15		GND	Module Ground	1
16		GND	Module Ground	1
17	CML-O	RD-	Receiver inverted data output	
18	CML-O	RD+	Receiver non-inverted data output	
19		GND	Module Ground	1
20		VCC2	+1.8V Power Supply – Not required	
21	LVTTL-I	P_Down/RST	Power Down; When high, places the module in the low power stand-by mode and on the falling edge of P_Down initiates a module reset	
			Reset; The falling edge initiates a complete reset of the module including the 2-wire serial interface, equivalent to a power cycle.	
22		VCC2	+1.8V Power Supply – Not required	
23		GND	Module Ground	1
24	PECL-I	RefCLK+	Reference Clock non-inverted input, AC coupled on the host board – Not required	3
25	PECL-I	RefCLK-	Reference Clock inverted input, AC coupled on the host board – Not required	3
26		GND	Module Ground	1
27		GND	Module Ground	1
28	CML-I	TD-	Transmitter inverted data input	
29	CML-I	TD+	Transmitter non-inverted data input	
30		GND	Module Ground	1

**Notes:**

- 1) Module circuit ground is isolated from module chassis ground within the module.
- 2) Open collector; should be pulled up with 4.7k – 10kohms on host board to a voltage between 3.15V and 3.6V.

- 3) A Reference Clock input is not required by the XFP 80km tunable. If present, it will be ignored.


## Digital Diagnostic Functions

As defined by the XFP MSA, ETU-LINK XFP 80km tunable transceivers provide digital diagnostic functions via a 2-wire serial interface, which allows real-time access to the following operating parameters:

- Transceiver temperature
- Laser bias current
- Transmitted optical power
- Received optical power
- Transceiver supply voltage

It also provides a sophisticated system of alarm and warning flags, which may be used to alert end-users when particular operating parameters are outside of a factory-set normal range.


The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller inside the transceiver, which is accessed through the 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL pin) is generated by the host. The positive edge clocks data into the XFP transceiver into those segments of its memory map that are not write-protected. The negative edge clocks data from the XFP transceiver. The serial data signal (SDA pin) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially. The 2-wire serial interface provides sequential or random access to the 8 bit parameters, addressed from 000h to the maximum address of the memory. For more detailed information including memory map definitions, please see the XFP MSA

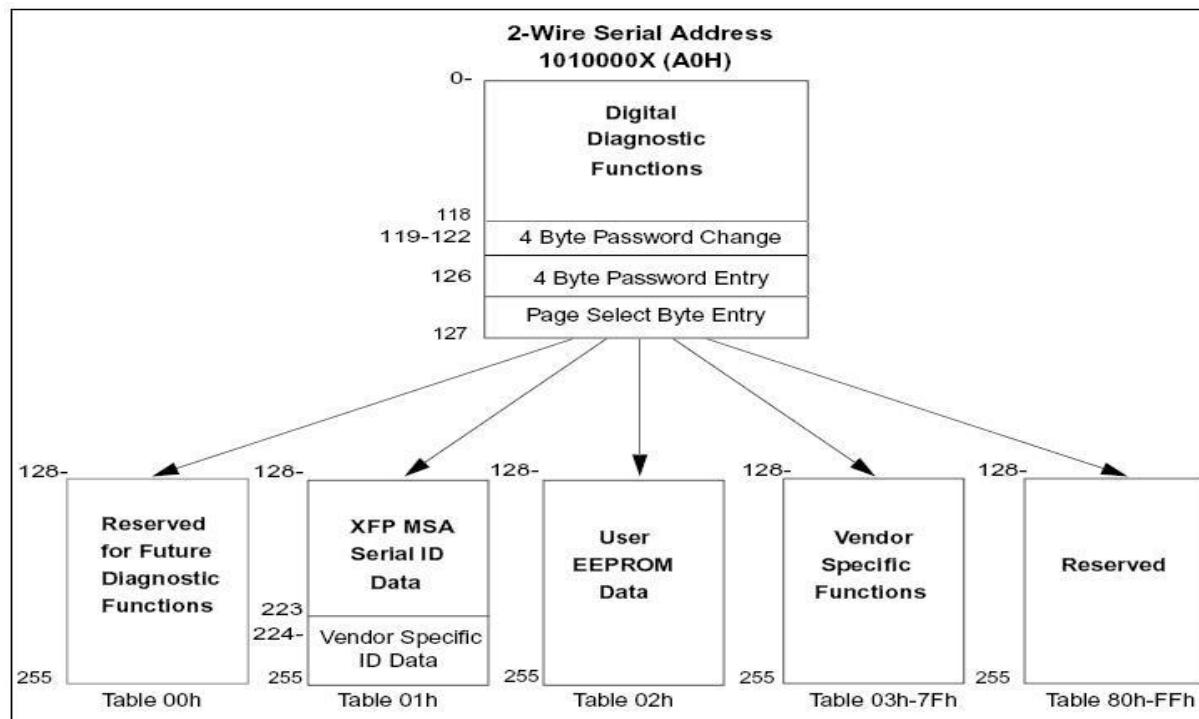

XFP two-wire serial digital diagnostic memory map


## Mechanical Specifications

ETU-LINK's XFP transceivers are compliant with the dimensions defined by the XFP Multi-Sourcing Agreement (MSA).

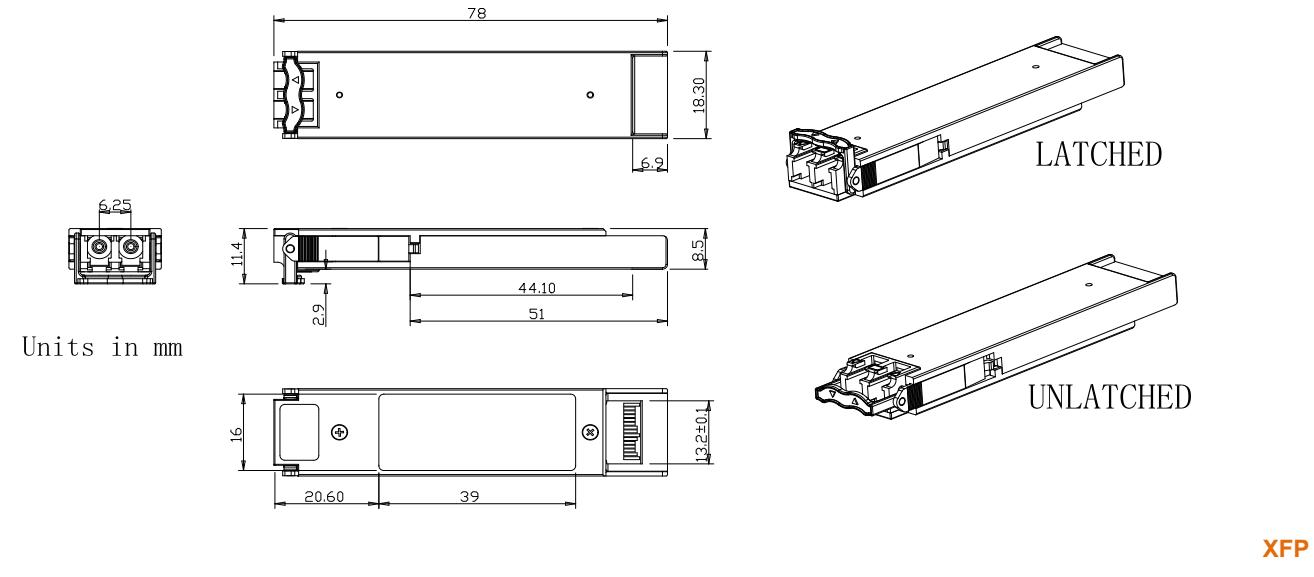


Transceiver (dimensions are in mm)

## PCB Layout and Bezel Recommendations

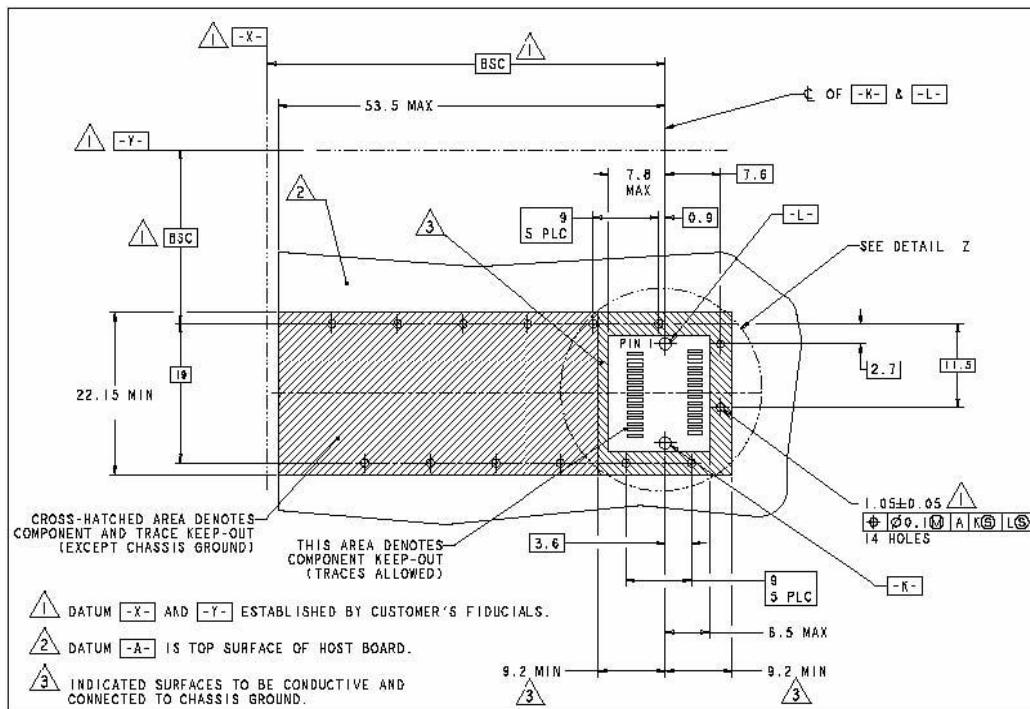

XFP Host Board Mechanical Layout (dimensions are in mm)

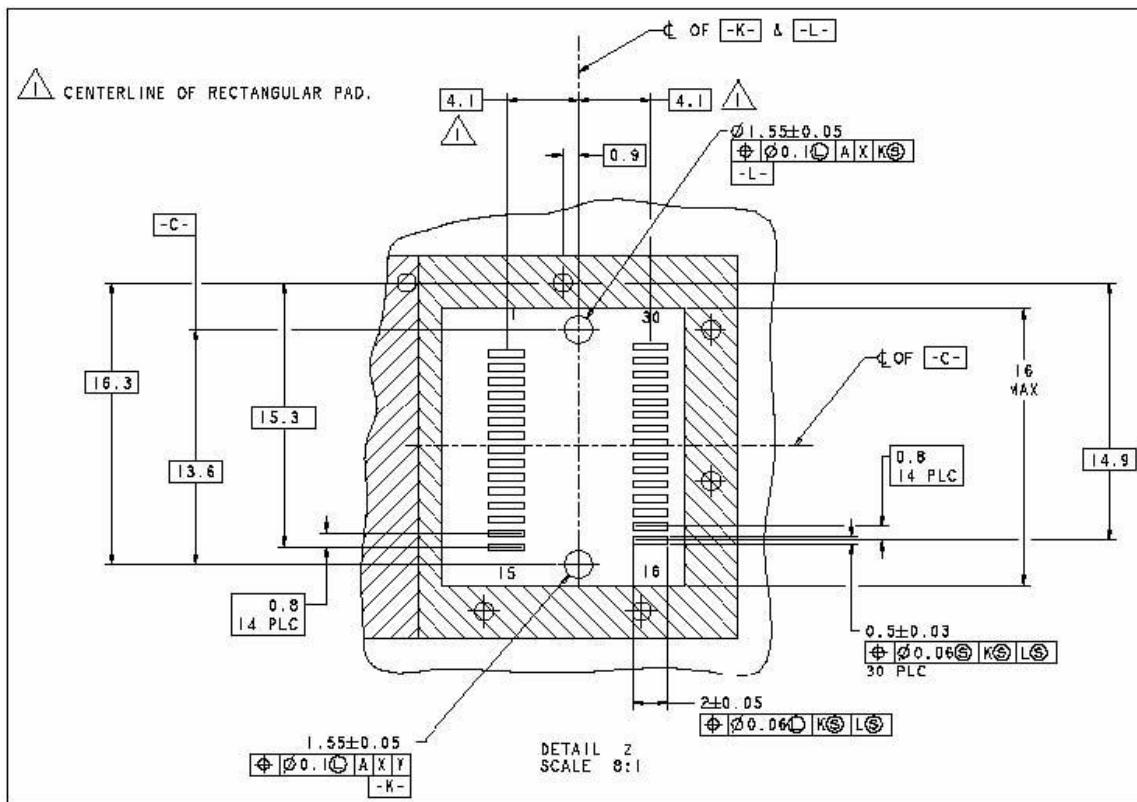

XFP Detail Host Board Mechanical Layout (dimensions are in mm)

## Regulatory Compliance

Feature	Reference	Performance
Electrostatic discharge (ESD)	IEC/EN 61000-4-2	Compatible with standards
Electromagnetic Interference (EMI)	FCC Part 15 Class B EN 55022 Class B (CISPR 22A)	Compatible with standards
Laser Eye Safety	FDA 21CFR 1040.10, 1040.11 IEC/EN 60825-1, 2	Class 1 laser product
Component Recognition	IEC/EN 60950, UL	Compatible with standards
ROHS	2002/95/EC	Compatible with standards
EMC	EN61000-3	Compatible with standards


## Compatibility Test

In order to ensure the product compatibility, our products will be tested on the switch before shipment. Our modules can compatible with many mainstream brand switches, such as Cisco, Juniper, Extreme, Brocade, IBM, H3C, HP, Huawei, D-Link, Mikrotik, ZTE, TP-Link...

Our test equipment: VOLKTEK MEN-4110, HP 2530-8G, CRS226-24G-25+RM, Catalyst 2960G Series, Catalyst 3850 XS 10G SFP+, Catalyst 3750-E Series, HUAWEI S5700Series, H3C S3100V2 Series, Juniper-EX4200, etc.



Cisco Catalyst 3850

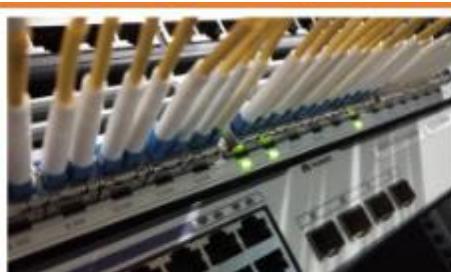

HUAWEI S5700



H3C S3100V2



HP J9264AR



Juniper EX 4200



Alcatal 6850E-U24X



Mikrotik CR5226-24G-25+RM



Cisco Catalyst 2960G



Volktek MEN-4110

## Product Production Process

# Quality Assurance

Continuous introduction of new equipment, produced by strict standards, strict quality inspection, to guarantee the high quality standard of each product.



Standardized Production Line




Professional Welding



Assembling



Aging Testing



Distance Testing



Cleaning end face



Product Initial Test



Switch Testing



Product Final Test

## Packaging

ETU-Link provides two kinds of packaging, 10pcs/Tray and individual package.



**Inner Tray**



**White**



**10pcs/Tray**



Company: ETU-Link Technology Co., LTD

Address: 4th Floor, C Building, JinBoLong Industrial Park, QingQuan Road, LongHua District,  
Shenzhen city, GuangDong

Tel: +86-755 2328 4603

Addresses and phone number also have been listed at [www.etulinktechnology.com](http://www.etulinktechnology.com).

Please e-mail us at [sales@etulinktechnology.com](mailto:sales@etulinktechnology.com) or call us for assistance.