





1U height 19 width 48 core LC connector Fiber optic Distribution Frame

Applied Range


- IDC
- Telecom Room
- FTTH build
- LAN / WAN

Product Parameter

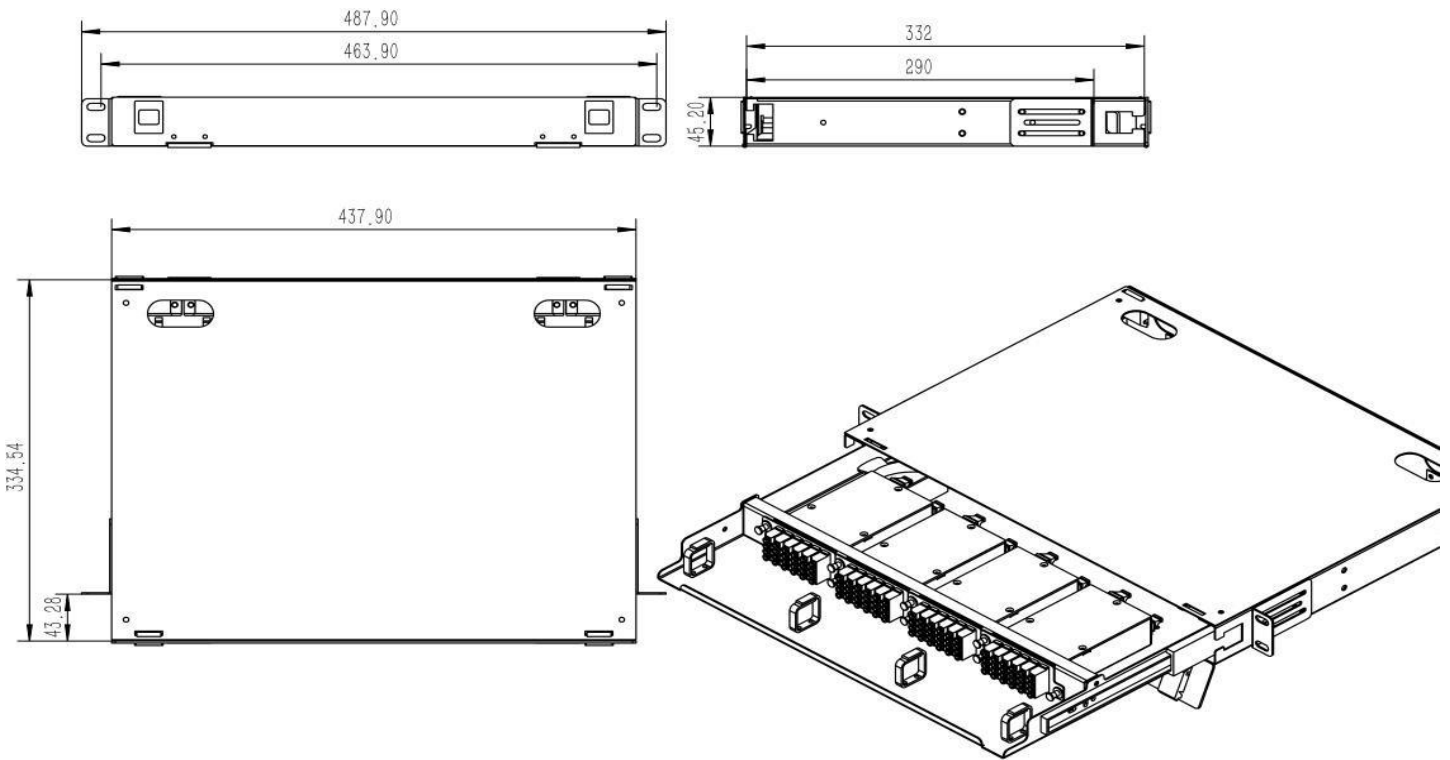


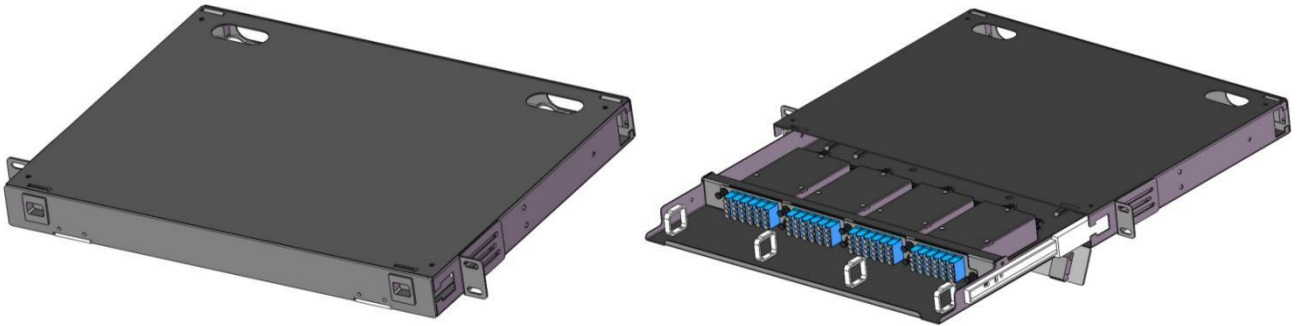

1Usize: 438mm (D) 334mm (W)


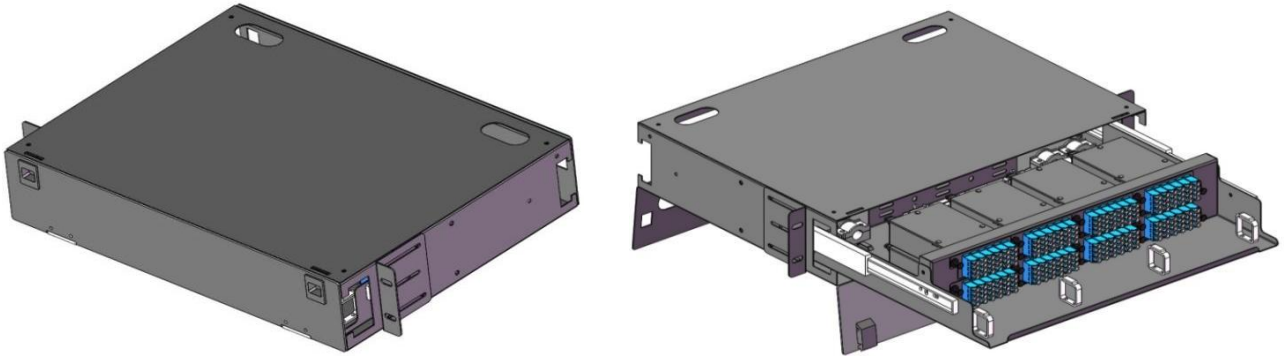


44.5mm (H)
2Usize: 438mm (D) 334mm (W) 89mm (H)

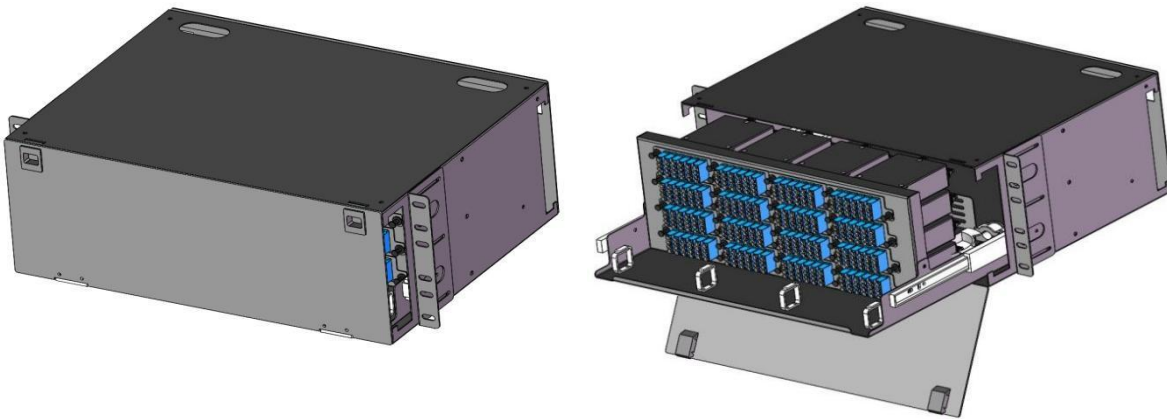

4Usize: 438mm (D) 334mm (W) 175mm (H)

Adapter panel

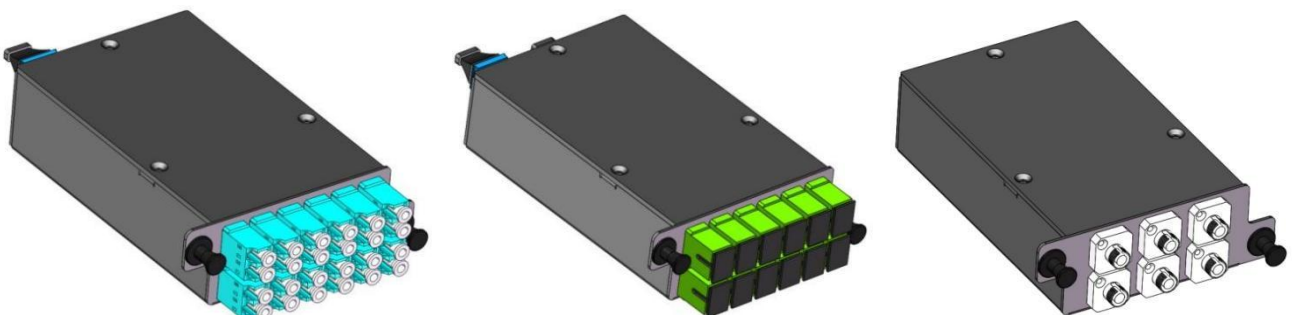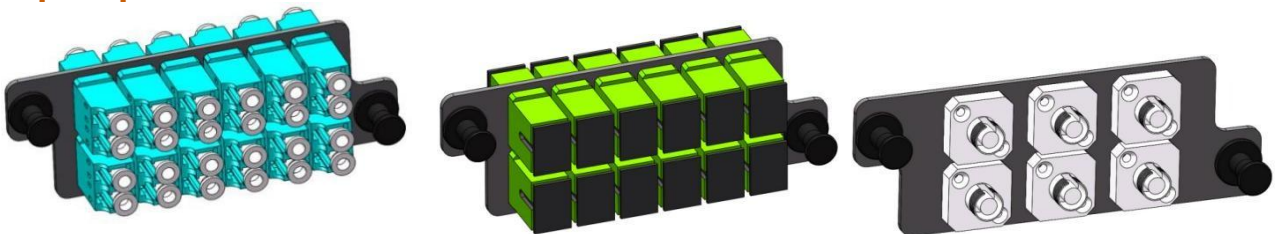



1U Panel: Drawer Type

Adapter	12-Fiber	24-Fiber	48-Fiber	72-Fiber	96-Fiber
FC/ST	YES	YES	/	/	/
SC	YES	YES	YES	/	/
LC	YES	YES	YES	YES	YES

2U Panel: Drawer Type

Adapter	24-Fiber	48-Fiber	72-Fiber	96-Fiber	144-Fiber	192-Fiber
FC/ST	YES	YES	/	/	/	/
SC	YES	YES	YES	YES	/	/
LC	YES	YES	YES	YES	YES	YES

4U Panel: Drawer Type

Adapter	24-Fiber	96-Fiber	144-Fiber	192-Fiber	288-Fiber	384-Fiber
FC/ST	YES	YES	/	/	/	/
SC	YES	YES	YES	YES	/	/
LC	YES	YES	YES	YES	YES	YES

Work Environment

- Operating temperature: -10°C - + 45°C
- Storage temperature: -40°C + 70°C
- Relative humidity: 85% (+ 30°C)

Product Packaging

